

LIGHTING STAND

483T 3 SCT Wind-Up Stand w/Auto Self-Locking device

L 181 cm 71.3" **H** 380 cm 149.7" **W** 22.4 kg 49.4 lbs

F 128 cm 50.4" **max** 30 kg 66.1 lbs **C** KC-100



3 sections.

Dia.: 55 mm, 45 mm, 38 mm

Leg dia.: 30 mm

Chrome plated steel stand
w/geared column.

2 risers extend simultaneously at one
elevation of 4.4 cm per handle turn.

Safety cable ensures simultaneous
retrieval of all sections.

With 1 leveling leg

Auto Self-Locking device
stop unexpected drop-off,
and make operation safer.
(PAT.ZL2006201577133.0)

Lock position

The safety pin will auto
insert to the holey tube
when wind-up.



Unlock position

The inside spring will bring
the safety pin back.



LIGHTING STAND

Features of Wind-up stand

The stand top mounted by a steel bolt through the top tube that offers most sturdy and solid assembly.



The tension of break shoe can be adjusted with Allen wrench.



To prevent the tube falling off rapidly, the wind-up handle should be inserted in between center pole and legs.



Velcro is supplied to fasten the legs for better storage and transportation.




OPTIONAL ACCESSORY
KS-056 LATERN BAR 6 x lantern T Bar
1420mm long with Dia. 28mm stud



483-BP Base Plate
Set for three available with
481,482,483T,470 stands.



Leveling legs should be set into horizontal at leaning location.



Bright color warning sticker for safety operation.



Top section tube can be adjusted by stepping on foot step.



Casters are optional for easily moving the stand. The stand foot is rugged zinc-casting. Dia.: 100mm with brake and M10 attachment. A set is for three (KC-100).



LIGHTING STAND


482T 2 SECTIONS WIND UP STAND

CHROME PLATED STEEL STAND WITH GEARED COLUMN

Elevation: 2.2 cm per handle turn,
2 Sections, Dia.: 55, 45 mm, 1 Riser, Leg Dia.
30 mm, One leveling leg

L 165 cm **H** 245 cm **W** 18.5 kg

max 128 m **max** 45 kg **T** 28 mm

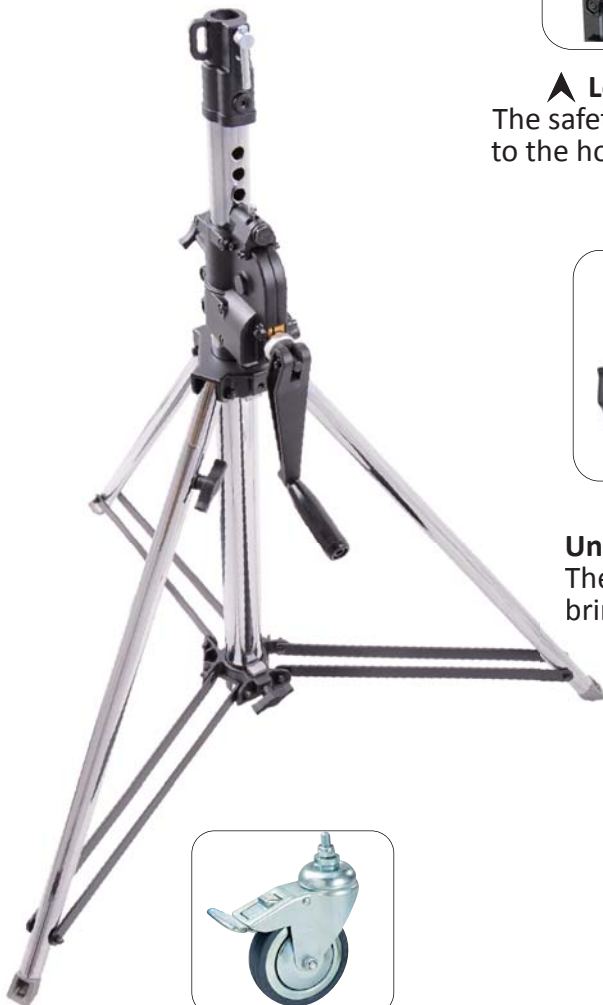

OPTIONAL ACCESSORIES KC-100 CASTER

Dia. 80 mm w/brake, Set for three

481 Wind-up Followspot Stand

CHROME PLATED STEEL STAND WITH GEARED COLUMN

Elevation: 2.2 mm per handle turn,
2 Sections, Dia.: 55, 45 mm
1 Riser, Leg Dia. 30 mm, One leveling leg,
with auto-lock

L 110 cm **H** 145 cm **W** 13.5 kg

max 110 cm **max** 50 kg **T** 28mm



▲ Lock position

The safety pin will auto insert
to the holey tube when wind-up.



▼ Unlock position

The insdie spring will
bring the safety pin back.



KS-056 LATERN BAR

6 x lantern T Bar
1420 mm long with; Dia. 28 mm stud

LIGHTING STAND

470 FOLLOWSPOT STAND

CHROME PLATED STEEL CENTERPOST

1 Riser, 2 Sections, Dia.: 40, 50 mm

Leg Dia. 30 mm, One leveling leg, Memory collar



L	109cm	H	147cm
W	8.70KG	T	28mm
max	110cm	max	40KG

226M MASTER COMBO HD STAND

CHROME PLATED STEEL STAND

3 Sections, DIA.: 40, 35, 30 mm

2 Riser, Leg DIA. 22 mm with leveling leg, spring cushioned



L	132cm	H	338cm
W	9.15KG	T	28mm
max	132cm	max	40KG



OPTIONAL ACCESSORIES

KC-100 CASTER FOR 470 STAND

Dia. 100 mm w/brake, Set for three



KS-080 FOR 470 STAND

Ball Race M10 stud

KS-082 FOR 470 STAND

Ball Race M12 stud



OPTIONAL ACCESSORIES

KC-080R CASTER FOR 226M STAND

Dia. 80 mm w/brake, Set for three



KS-040 FOR 470 STAND

28 mm Pin w/M10 thread & Dia.12cm plate

KS-042 FOR 470 STAND

28mm Pin w/M12 thread & Dia.12cm plate

SAND BAG

Kupo sand bag is constructed from denier polyester canvas. It can be filled with sand or anything else to secure the light stand. Each side of the bag has a hand strap, butterfly handle and center handle, using a box pattern to ensure a durable attachment. The sandbag is shipped empty for convenience and economy, and available in 15, 25, 35 pounds.



Butterfly Handle



Item number

KSD-1680A Sand bag 15 pounds

KSD-1680B Sand bag 25 pounds

KSD-1680C Sand bag 35 pounds



LIGHTING STAND

473B Tall Stand Black

Black painting steel stand

Smaller footprint better for tighter space.

Light weight for easier transportation

Optional Caster: KC-100



155 cm



380 cm

Spring cushion in tube



9 kg



102 cm

Tube dia. 35, 30, 25 mm



25 kg



28 cm

Leg dia. 22 mm

One leveling leg



355 Universal Floor Stand

Low profile, lightweight compact folding floor stand. Constructed of anodized aluminum legs and central column. With die-casting legs mount. Design for a 28 mm spigot, a 19 mm spigot with supplied adaptor.

Optional adaptor for 16 mm is available.



35.1 cm
12.4"



13 cm
5.12"

Best Mobility



60 cm
23.6"



10 kg
22 lbs



1.05 kg
2.31 lbs



Ø 19 mm

Ø 28 mm



19 mm adaptor is
supplied with stand



16 mm adaptor
is optional

LIGHTING STAND

484 HEAVY DUTY WIND-UP STAND

3 Sections, DIA.: 70 mm, 60 mm, 50 mm
2 Risers extend simultaneously at one elevation of 4.4 cm per handle turn
Leg DIA.: 35 mm With 1 leveling leg
Center tube & legs: Stainless steel
Top 2 sections: Chrome plated steel
With Auto Self-Locking Device

L 196 cm **H** 386 cm **W** 39 kg
F 180 cm **max** 80 kg **T** 28 mm



Unlock position

The insdie spring will bring the safety pin back.



Lock position

The safety pin will auto insert to the holey tube when wind-up.



28mm socket with 3 side holes for wind bracing kit



Solid and strong handle with slip-free design offer excellent operation.



Auto Self-Locking device stop unexpected drop-off and make operation safer



Larger foot step with skidproof texture design



U shape struts is made by stainless steel material. It is strong and stable



6" casters with the brake and M12 attachment. Take off the casters, the legs still can stand on the floor

