



# PAR BAR

## VS Par Bar


The VS PAR BAR is launched with the high quality that Kupo Bar Par has been known for, featuring new construction of the bar with versatile socket. With the classic 3.8mm(T) x 51mm(dia.) aluminum alloy tube in selective length together with ABS-injected versatile socket for seating the power panel, VS PAR BAR is going to fulfill both conventional and uprising mainstream LED fixtures in entertainment field.

VS PAR BAR has diverse models. The DMX model is wired with 20A power connector for main input and output, as well as 5-pin XLR for DMX in and thru connection. It is available in 4-outlet and 6-outlet, and each outlet comes one VS socket with Schuko female and DMX female for power and data connection for every single fixture. The DMX model is catering to the demand of LED fixtures. The conventional model is wired with 19-pin panel male for dimmer control, and Schuko or CEE is mounted on versatile socket in this range. Special configuration is available upon request.

## PARBAR with Versatile Socket & DMX outlet




**PB-606VSS-P**

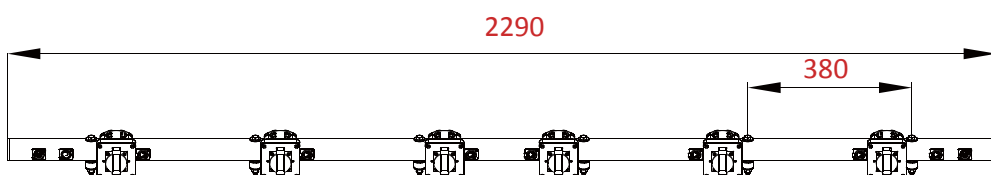

Par Bar with 20A power in/out connectors; 6-way versatile socket & Schuko outlet; each outlet with 5P XLR DMX out



**PB-604VSS-P**

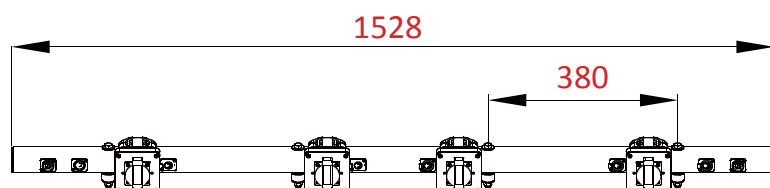


Par Bar with 20A power in/out connectors  
4-way versatile socket & Schuko outlet  
Each outlet with 5P XLR DMX out

## PARBAR with Versatile Socket

Please be noted that the code for Versatile sockets mounted on the lighting bar instead of the 65cm tail are:

- ① CEE form for Versatile socket: Please have /VSC after above specified item number.
- ② SCHUKO for Versatile socket: Please have /VSS after above specified item number.

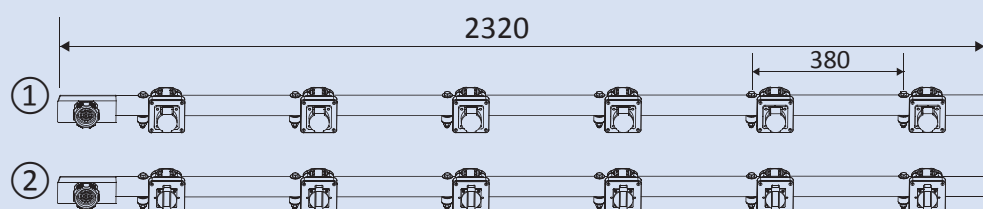

PB-606SC-P/VSC  
PB-606SC-B/VSC

PB-606SC-P/VSS  
PB-606SC-B/VSS






# PAR BAR

## PARBAR



All KUPO lighting bars are manufactured from dia. 51mm x 3.8mm thickness aluminum tube with a cast aluminum box. It comes with 65cm 3C x 1.5mmsq (16AWG) silicon cable for power connection. The following is our range of light bars; other variations of lighting bars are available upon request.

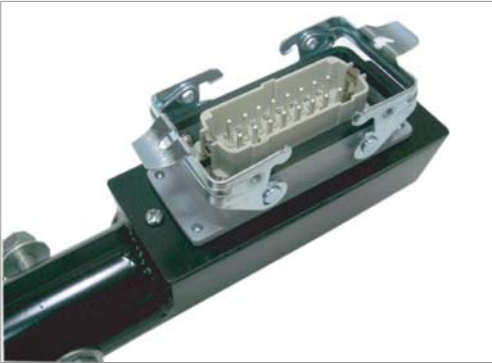


PB-606SC-B  
PB-606SC-P




PB-604SC-B  
PB-604SC-P

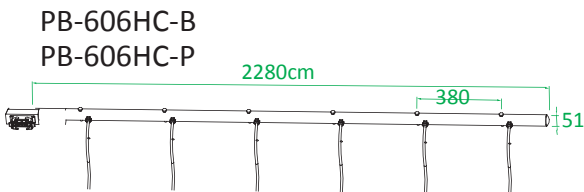


PB-606HC-B  
PB-606HC-P

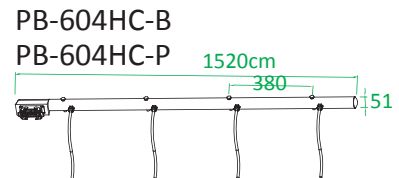

PB-604HC-B  
PB-604HC-P

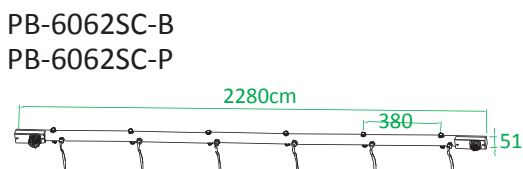


PB-6062SC-B  
PB-6062SC-P

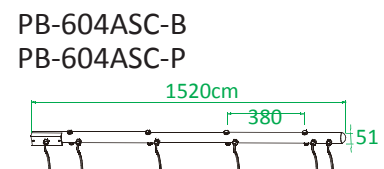


PB-604ASC-B  
PB-604ASC-P

PB-604ASC wiring in 220V

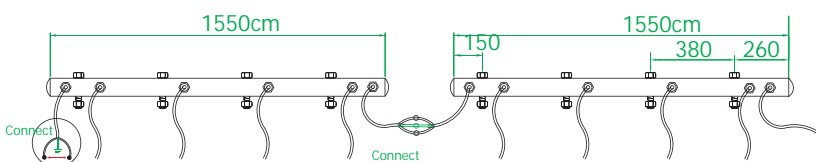

PB-6042SC-B  
PB-6042SC-P



Cat. No.	Description
PB-606SC-B/P	6 circuits wired from 19 Pin chassis connector to 6 x 65cm tails black / polish
PB-604SC-B/P	4 circuits wired from 19 Pin chassis connector to 4 x 65cm tails black / polish
PB-604ASC-B/P	Aerobar series wired from input to 4 x 65cm black / polish
PB-6062SC-B/P	6 circuits wired from 19 Pin male to 19 Pin female chassis connector to 6 x 65cm tails black / polish
PB-606HC-B/P	6 circuits wired from 16 Pin male chassis connector to 6 x 65cm tails black / polish
PB-604HC-B/P	4 circuits wired from 10 Pin male chassis connector to 4 x 65cm tails black / polish
PB-6042SC-B/P	4 circuits wired from 19 Pin chassis connector to 4 x 65cm tail with 2 more circuits at bar end black / polish