

FREZNO Ze-2 HD

SS808SW HD /SC HD

The FREZNO Ze-2 HD is a professional Fresnel with high density integrated source, 50% higher output over the 1st great successful version, can truly replace the traditional 2000WFresnel. Equipped with smooth and precise electronic zoom system, CRI>90, it is professional intelligent lighting designed for theater, TV studio, banquet, and all kinds of conference hall etc.



FREZNO ze-D2 HD

SS808SW HDD/ SC HDD

This product specifically design for replacing the traditional lampFresnel, which controlled by the dimmer pack; It fully match with previous SCR (Silicon Controlled Rectifier) controller, and the DMX512 signal, dimming smooth, no shading. Intelligent power management system can automatically recognize the DMX 512 protocol and SCR. High efficient electronic zoom system. 50% brighter over the 1st successful version, CRI>90, with compact structure, professional industrial design, FREZNO ze-D2 HD is a truly energy saving fixture.

FREZNO PO-2 HD

SS808SWP HD/SCP HD


The FREZNO PO-2 HD is a new generation innovative functional product, with the new internal structure. The new high efficient pole operation function can adjust the X, Y, manual zoom. 50% times brighter over the 1st version, it issuitable for TV, studio application.

100~240VAC Input Voltage	Dimmer On-board	0~20Hz Strobe	DMX512 Dimming Pack Control Control	DMX in/out Power in/out Fixture Connection	0-100%(16-bit) Dimmer	Forced convection Cooling	CE/CETL Certification	0°~45° Operation Temperature
-----------------------------	--------------------	------------------	---	---	--------------------------	---------------------------------	--------------------------	------------------------------------


SPECIFICATIONS	SS808SW HD/SWP HD/SW HDD	SS808SC HD/SCP HD/SC HDD
● Color Rendering	> 90Ra	> 90Ra
● CQS	>90	>85
● Driver Current	3A	3A
● Max Power	180W	180W
● Con Personality	UNO,DOS,STD.P 1CH,2CHS,3CHS	UNO,DOS,STD.P 1CH,2CHS,3CHS
● Electronic Zoom	15°-60°	15°-60°
● Color Temperature	3200K	5600K
● Dimensions	417X286X260mm(SW HD/SW HDD) 379X246X536mm(SWP HD)	417X286X260mm(SC HD/SC HDD) 379X246X536mm(SCP HD)
● Weight	6.6kg(SW HD/SW HDD) 7.2kg(SWP HD)	6.6kg(SC HD/SC HDD) 7.2kg(SCP HD)
● Housing	Extruded aluminum	Extruded aluminum
● Color	Black	Black
● Environment	Dry	Dry

ILLUMINANCE AT DISTANCE

SS808SW HD/SWP HD/SW HDD

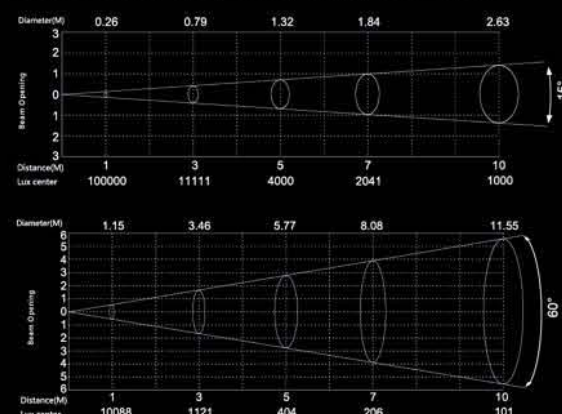


SS808SC HD/SCP HD/SC HDD

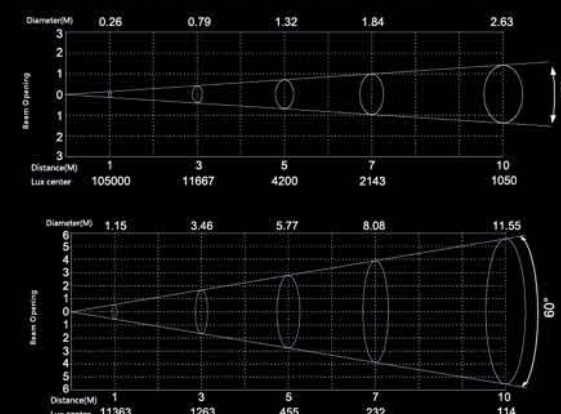


DIMENSION

SS808SW HD/SW HDD /SC HD/SC HDD

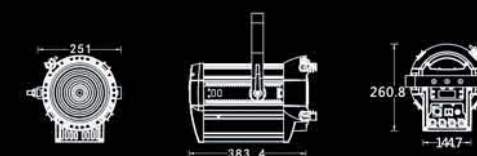

SS808SWP HD/SCP HD (Pole operation: Pan,Tilt,Zoom)

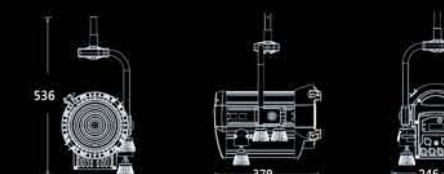

ACCESSORIES



Barn doors
(P/N:K40225)

* Accessories not included unless otherwise stated